

# PSDCSEP

Multi-output power supply units 12VDC  
enclosed with adjustable output voltage  
and galvanic separation between outputs




## Features:

- enclosed modular switching power supply;
- galvanic isolation between the channel;
- independent voltage adjustment for each output (12–15VDC);
- each output protected by separate fuse (max. F1A);
- fuse failure indication (optical);
- possibility of mounting power supplies on TH35 rail (required DIN adapter).

Code	Output voltage (adjustable)	Output current	Fuse	DIN adapter	Dimensions L×W×H [+/- 2mm]
<b>PSDCSEP-12V4x1A</b>	4 adjustable outputs (12–15VDC)	4 × 1A	1A	DIN4	204×141×52

## ACCESSORIES:

DIN4

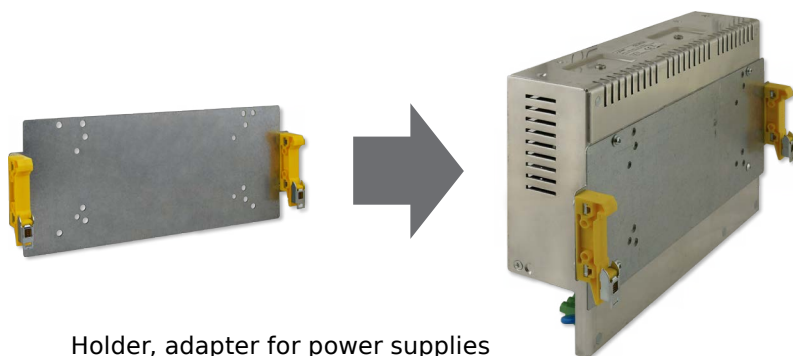

Holder, adapter for power supplies  
(allows mounting power supplies on TH35 rail).



