



1. Application:

AWO384 metal enclosure is designed for mounting built-in power supplies of the following **series**:

- **LRS**-35-xx, LRS-50-xx, LRS-75-xx, LRS-100-xx, LRS-150-xx.
- **RS**-15-xx, RS-25-xx, RS-35-xx, RS-50-xx, RS-75-xx, RS100-xx.
- **PS**-15xxxx, PS-25xxxx, PS-40xxxx, PS-60xxxx.
- **PS**-12V2A, PS-12V2A, PS-12V3A, PS-12V5A, PS-48V1A

The enclosure is made of steel with a thickness of 0,7mm, in white color RAL9003. It is equipped with a set of M3x4 screws - 2 pieces - for mounting the power supply.


2. Installation:

The enclosure should be mounted by a qualified installer, holding relevant permits and licenses (applicable and required for a given country) for 230 V AC and low-voltage installations.

The housing can be mounted inside, at a temperature range from -10°C up to +40°C.

3. Technical parameters

Enclosure: IP	IP20
Application	indoor
Operating temperature	-10°C ÷ 40°C
External dimensions of enclosure	W=148, H=204, D+D₁=51+8 [+/- 2mm]
External dimensions of flange	W₁=153, H₁=208 [+/- 2mm]
Locking	Cylindrical screw x1
Net/gross weight	0,62 / 0,70 [kg]
Finish	DC01 sheet, thickness: 0,7mm Corrosion protection Color: RAL 9003 (white)
Notes	The enclosure includes a set of M3x4 screws – 2 pieces. Distance from the wall 8mm

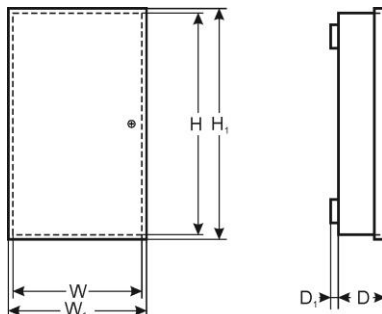

Pulsar sp. j.

Siedlec 150, 32-744 Łapczyca, Poland
Tel. (+48) 14-610-19-40, Fax. (+48) 14-610-19-50
e-mail: biuro@pulsar.pl, sales@pulsar.pl
http:// www.pulsar.pl, www.zasilacze.pl