



1. Destination:

Enclosures construction is compliant with requirements of General Data Protection Regulation (GDPR), as personal data must be protected and stored securely.

Enclosure, protects recorder against unauthorized access or theft, is made of 1 mm thick steel. Set includes two keys (different code) for each of two locks and tamper switch indicating enclosure opening.

Possibility of mounting:

- **AWO445BR** – bracket to "hang" the enclosure e.g. under tabletop, etc...
- **ARAW45** – fan with temperature sensor 45°C

2. Specifications:

Table 1. Electrical parameters.

Tamper switch protection	1 x microswitch: opening of enclosure 0,5 A; 50 V DC max. NC - normally closed contacts
Protection class EN 62368-1	I (first)
Rated current of protective connection	6 A max
Declarations, warranty	CE, 2 years

Table 2. Mechanical parameters.

External dimensions of enclosure	$W=400, H+H_3=99+14, D=300$ [+/-2 mm]
External dimensions of front panel	$W_1=405, H_1=105$ [+/-2 mm]
Dimensions of recorder space	$W_2=355, H_2=90, D_2=235$ [+/-2 mm]
Material	sheet steel DC01, thickness: 1,0mm corrosion protection Color: RAL 9003
Closing	Lock x 2 pcs (different code)
Destination	inside
Net/gross weight	3.45 / 3.7 [kg]
Notes:	distance from wall 14mm possibility to mount a bracket to "hang" the enclosure - AWO445BR possibility to install ARAW45 fan

Table 3. Operating parameters.

Protection grade EN60529	IP20
Operating temperature	-10°C ...+40°C
Storage temperature	-20°C ...+60°C
Relative humidity	20%...90%, without condensation
Sinusoidal vibrations during operation	unacceptable
Impulse waves during operation	
Direct insolation	
Vibrations and impulse waves during transport	PN-83/T-42106

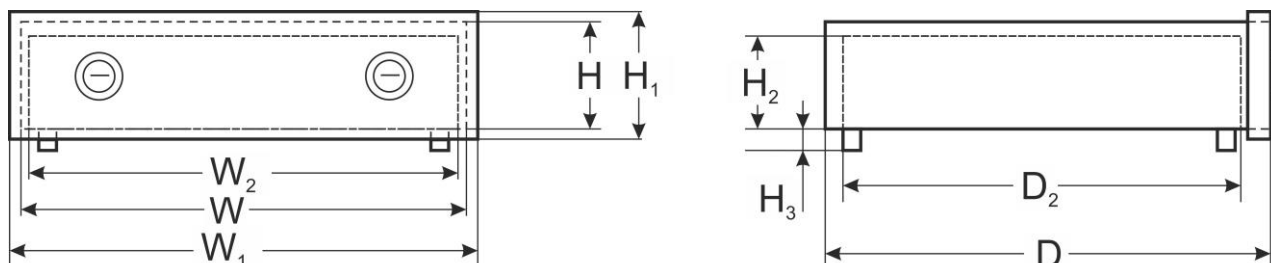


Figure 1. Dimensions.



Figure 2. View of enclosure.



Figure 3. Sample assembly – Fan ARAW45 / recorder / Mounting AWO445BR

Pulsar sp. j.

Siedlec 150, 32-744 Łapczyca, Poland

Tel. (+48) 14-610-19-45

e-mail: sales@pulsar.pl

http:// www.pulsar.pl

