


CODE: **AWO000EMT** v1.0/II
NAME: **Casing 7/20/DSPR/EMPTY**

EN

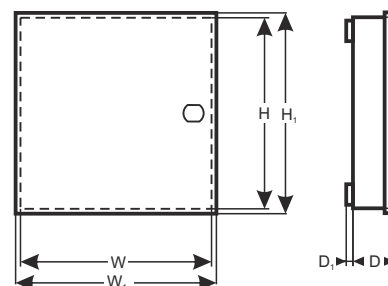

DESTINATION

CROW:

Alarm control panels: RUNNER4, RUNNER8.

DSC:

Power Series Neo

Alarm control panels: HS2016, HS2016-4, HS2032, HS2064, HS2128.

Modules: HSM2300, HSM2204, HSM2208, HSM2108, PCL-422.

Power Series

Alarm control panels: PC1616, PC1832, PC1864.

Modules: PC5320, PC5100, PC5108, PC4216, PC5200, PC5204, PC5400, IT-100.

Power Series Pro

Modules: HSM3408, HSM2108, HSM3204CX, HSM3350, AMX-400.

EBS:

Alarm control panels: PX 202A.

PARADOX:

Alarm control panels: EV0192, SP65, SP4000, SP5500, SP6000, SP7000.

Modules: ZX8, ZX8SP, HUB2, PGM4.

PYRONIX:

Alarm control panels: MATRIX 424, MATRIX6

RISCO:

Alarm control panels: RP432EZ8 LightSYS ProSYS Plus, RP512EZ16 ProSYS Plus.

ROEL:

Alarm control panels: SIGMA6, SIGMA12, CERBER.

SATEL:

Alarm control panels: Integra32, 24, Versa5, 10, 15 Plus, IP, Perfecta16, 32, 32 LTE -T 32, Micra, CA-10 P, CA-6 P, CA-5 P, CA-4 VP.

Modules: CA-64 PTSA, ETHM-1 Plus, ETHM-2, GSM-X, GSM-X LTE, INT-O, INT-PP, INT-R, INT-VMG, ACCO-NT, ACCO-KP-PS, ACCO-KPWG-PS.

SUMMIT:

Alarm control panels: PENTA.

TELMOR:

Alarm control panels: TCA-824, TEX800.

Documentation shows which devices can be installed in a given enclosure. It does not define how many different devices can be installed in one enclosure. Number of installed devices depends on their size and arrangement.

TECHNICAL DATA

External dimensions of enclosure	W=250, H=250, D+D _i =80+8 [+/-2 mm]
External dimensions of front panel	W _i =255, H _i =255 [+/-2 mm]
Recommended battery/batteries	7 Ah / 12 V (SLA)
Net/gross weight	1,25 / 1,35 [kg]
Transformer	Not included, possibility of installing: AWT050, AWT053, AWT150, AWT468
Operating conditions	-10°C ÷ +40°C, relative humidity 20%...90%, without condensation
Material	Steel sheet DC01, thickness 0,7 mm, anticorrosion protection, colour RAL9003
Destination	Inside
Warranty	2 years
Notes	Assembly kit PKAZ158, designed for enclosure, includes: tamper switch, earthing wires, wire connector, Possibility of installing lock MR008 / MR027 Possibility of mounting tamper switch PKAZ066 detects detachment from wall