



MOUNTING ISTRUCTIONS V1.0

Code: **AW0529S**

Name: **Enclosure DVR/SMALL/VERTICAL**
Metal enclosure for CCTV recorder

IM529S



Edition: 2 z from 18.01.2024
Supersedes edition: 1 from 14.06.2023

1. Destination:

Enclosure protects recorder against unauthorized access or theft. Made of 1,2 mm steel plate. Set includes one key (different code), two keys included and tamper switch unwanted enclosure opening.

Due to vertical installation and low depth, it is ideal for places where deeper enclosures or cabinets type RACK 19" cannot be installed.

After opening enclosure, front cover is held in a horizontal position, providing easy access to buttons on front panel of DVR.

Enclosure has a special holder with retaining straps that allows for installation of recorders of following dimensions: width up to 375 mm, height: up to 95 mm, depth up to 335 mm.

2. Specifications:

Table 1. Electrical parameters.

Tamper switch protection	1 x microswitch: opening of enclosure 0,5 A; 50 V DC max. NC - normally closed contacts optionally: 1 x microswitch: detachment form wall, 0,5A; 50 V DC (required PKAZ067)
Protection class EN 62368-1	I (first)
Rated current of protective connection	6 A max
Declarations, warranty	CE, 2 years

Table 2. Mechanical parameters.

External dimensions of enclosure	W=432, H=501, D+D ₂ =121+14 [+/-2 mm]
External dimensions of front panel	W ₂ =438, H ₂ =507 [+/-2 mm]
Dimensions of recorder space	W ₁ =375, H ₁ =335, D ₁ =95 [+/-2 mm]
Material	sheet steel DC01, thickness: 1,2mm corrosion protection Color: RAL 9005 (black matt)
Closing	Lock x 1 pcs (MR008 different code)
Destination	inside
Net/gross weight	8,1 / 8,8 [kg]
Notes:	distance from wall 14mm set includes one key (different code), two keys included enclosure is fitted with straps for mounting recorder, vertical installation of recorder

Table 3. Operating parameters.

Protection grade EN60529	IP20
Operating temperature	-10°C ...+40°C
Storage temperature	-20°C ...+60°C
Relative humidity	20%...90%, without condensation
Sinusoidal vibrations during operation	unacceptable
Impulse waves during operation	
Direct insolation	
Vibrations and impulse waves during transport	PN-83/T-42106

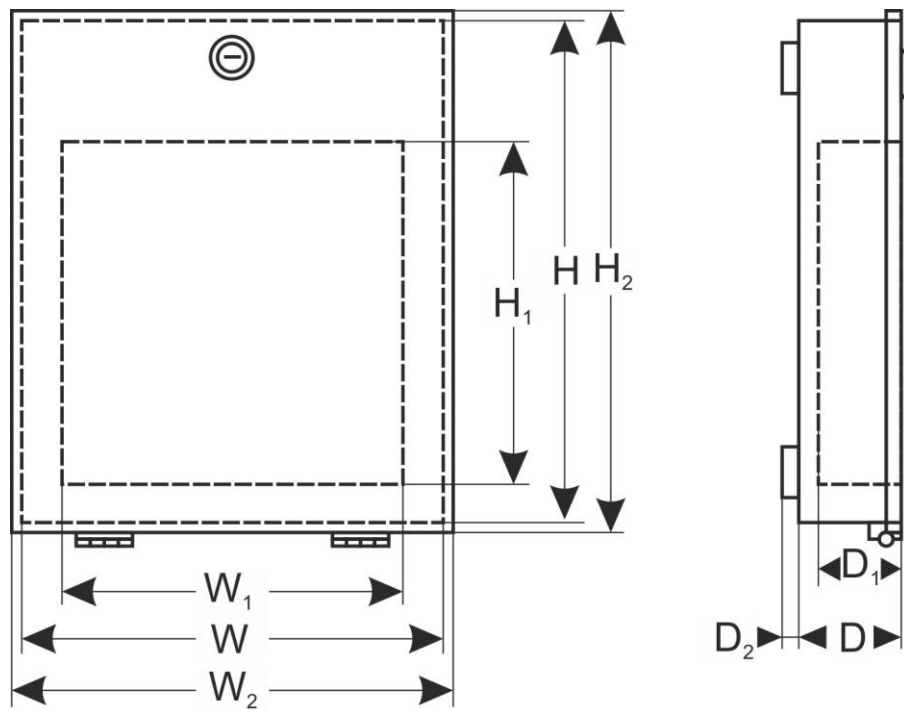


Figure 1. Dimensions.



Figure 2. View of enclosure.



Figure 3. Sample assembly – recorder

Pulsar sp. j.

Siedlec 150, 32-744 Łapczyca, Poland

Tel. (+48) 14-610-19-45

e-mail: sales@pulsar.pl

http:// www.pulsar.pl

