


PSBS series power supply unit

Buffer, switch mode power supply unit 13,8V DC with technical outputs



CODE: **PSBS 5012D** v.1.1/VII
TYPE: **PSBS 13,8V/5A/40Ah/OC** Buffer switch mode power supply unit with technical outputs.

EN**

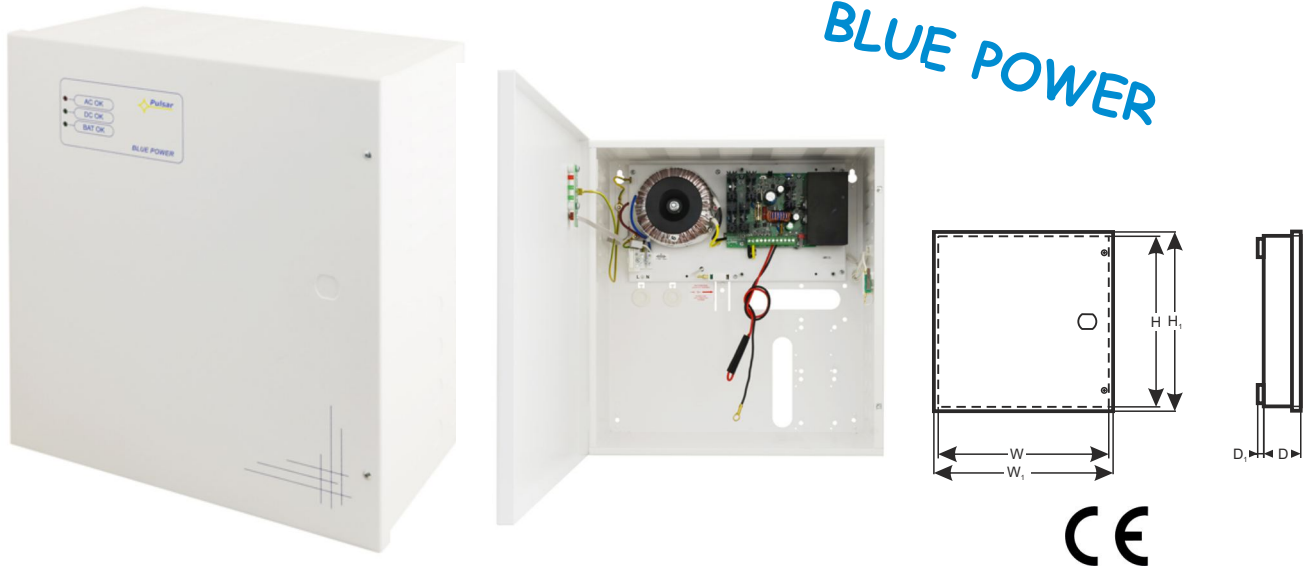

PSU features:

- uninterruptible power supply DC 13,8V/5A
- battery housing: 40Ah/12V
- supply voltage AC 230V
- high efficiency 76%
- low voltage ripple
- battery charging and maintenance control
- deep discharge battery protection (UVP)
- battery charging current 0,5A/1A/2A/3A, jumper selectable
- START button to start the battery
- battery output protection against short-circuit and reverse connection
- LED indication
- EPS technical output of 230V power failure – OC type
- PSU technical output indicating PSU failure – OC type
- LoB technical output indicating low battery voltage – OC type
- Optional installation of the MPSBS relay module changing technical outputs of the OC type to relay type
- adjustable times of 230V AC failure indication
- Protection type:
 - SCP short-circuit protection
 - Overheat protection OHP
 - surge protection
 - Tamper protection: enclosure opening and detachment from the wall
 - overload protection OLP
- warranty - 5 years from the production date

DESCRIPTION

A buffer PSU is designed for uninterrupted supply of devices requiring stabilized voltage of **12V DC (+/-15%)**. The PSU supplies voltage of **U=13,8V DC** and total current capacity of:

1. Output current **5A + 0,5A battery charging**
2. Output current **4,5A + 1A battery charging**
3. Output current **3,5A + 2A battery charging**
4. Output current **2,5A + 3A battery charging**

Total current + battery is max. 5,5A

In case of mains power loss, the unit will instantly switch to battery operation. The PSU is enclosed in a metal casing (color RAL 9003) with battery housing for 40Ah/12V batteries. The enclosure is fitted with a micro switch indicating door opening (front cover) and the detachment from the wall.

PSBS series power supply unit

Buffer, switch mode power supply unit 13,8V DC with technical outputs



SPECIFICATIONS	
PSU type	A (EPS - External Power Source)
Mains supply	230V AC (-15% /10%) 50Hz
Current consumption	0,57A@230VAC
PSU's power	76W
Efficiency	76%
Output voltage	11V± 13,8V DC – buffer operation 10V± 13,8V DC – battery operation
Output current	5A + 0,5A battery charging 4,5A + 1A battery charging 3,5A + 2A battery charging 2,5A + 3A battery charging
Voltage adjustment range	12±14,5VDC
Ripple voltage	60mV p-p max.
Battery charging current	0,5A / 1A / 2A / 3A – jumper selectable
Short-circuit protection SCP	Electronic - automatic return
Overload protection OLP	110-150% of the PSU power, manual restart
Battery circuit protection SCP and reverse polarity connection	T6,3A- current limitation, the F _{BAT} melting fuse
Surge protection	varistors
Deep discharge battery protection UVP	U<10V (± 0,5V) – disconnection of battery terminal
Tamper protection: - TAMPER output indicating enclosure opening or detachment from the wall	- micro switch, NC contacts (enclosure closed and mounted to the mounting base), 0,5A@50V DC (max.)
Technical outputs: - EPS; output indicating AC power failure - PSU; output indicating no DC power/PSU failure - LoB output indicating low battery voltage	- OC type: 50mA max. Normal operation: L state (0V), failure: hi-Z state, - delay time 10s/60s (+/-20%) – jumper selectable T _{Ac} - OC type: 50mA max. Normal operation: L state (0V), failure: hi-Z state, - OC type, 50mA max. Normal operation (U _{BAT} >11,5V): L state (0V), failure (U _{BAT} <11,5V): hi-Z state The power supply unit does not feature a battery detection function.
LED indication	Yes – LEDs
Operating conditions	2nd environmental class, -10 °C±40 °C
Enclosure	Steel plate, DC01 0,7mm color RAL 9003
Dimensions	W=330 H=350 D+D ₁ =172 + 8 [+/- 2mm] W ₁ =335 H ₁ =355 [+/- 2mm]
Net/gross weight	7,7kg / 8,8kg
Battery housing	40Ah/12V (SLA) max. 185x170x90mm (WxHxD) max
Closing	Cylindrical screw (at the front), (lock assembly possible)
Deklarations, warranty	CE, 5 years from the production date
Notes	The enclosure does not adjoin the mounting surface so that cables can be led. Convection cooling.



PSBS series power supply unit

Buffer, switch mode power supply unit 13,8V DC with technical outputs



OPTIONAL POWER SUPPLY CONFIGURATIONS:

- 1. Buffer power supply PSBS 13,8V/relay module MPSBS/40Ah**
- PSBS 5012D + MPSBS + 40Ah
- 2. Buffer power supply PSBS 13,8V/4x1A/MPSBS/40Ah**
- PSBS 5012D + LB4 4x1A (AWZ575 or AWZ576) + MPSBS + 40Ah
- 3. Buffer power supply PSBS 13,8V/8x0,5A/MPSBS/40Ah**
- PSBS 5012D + LB8 8x0,5A (AWZ578 or AWZ580) + MPSBS + 40Ah
- 4. Buffer power supply PSBS 13,8V/16x0,3A/MPSBS/40Ah**
- PSBS 5012D + LB8 16x0,3A (AWZ577 or AWZ580) + MPSBS + 40Ah
- 5. Buffer power supply PSBS 13,8V/12V/5A/MPSBS/40Ah**
- PSBS 5012D + RN500 (13,8V/12V) + MPSBS + 40Ah
- 6. Buffer power supply PSBS 13,8V/2x12V/2x2,5A/40Ah**
- PSBS 5012D + 2xRN250 (13,8V/12V) + 40Ah
- 7. Buffer power supply PSBS 13,8V/12V/16x0,3A/40Ah**
- PSBS 5012D + RN500 (13,8V/12V) + 2xLB8 16x0,3A (AWZ577 or AWZ580) + 40Ah
- 8. Buffer power supply PSBS 13,8V/12V/8x0,5A/MPSBS/40Ah**
- PSBS 5012D + RN500 (13,8V/12V) + LB8 8x0,5A (AWZ578 or AWZ580) + MPSBS + 40Ah
- 9. Buffer power supply PSBS 13,8V/12V/4x1A/MPSBS/40Ah**
- PSBS 5012D + RN500 (13,8V/12V) + LB4 4x1A (AWZ575 or AWZ576) + MPSBS + 40Ah
- 10. Buffer power supply PSBS 13,8V/2x5V÷7,4V/2x2A/40Ah**
- PSBS 5012D + 2xDCDC20(2x5V÷7,4V/2x2A) + 40Ah