
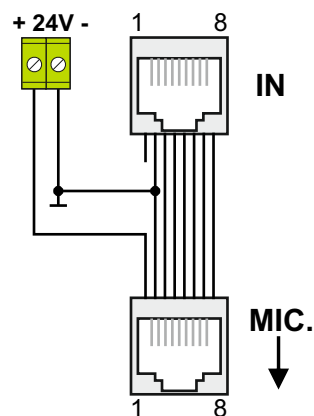



CODE: **AWZ627** v.1.0/1
NAME: **2xRJ45 Power adapter for firefighter's microphone**

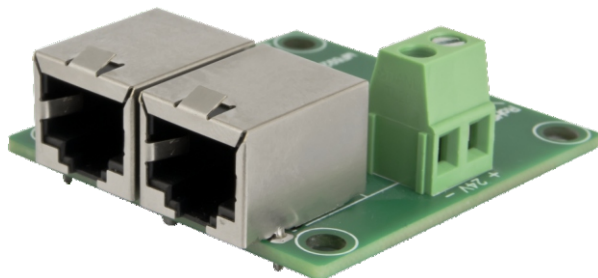

DESCRIPTION

The power adapter for firefighter's microphone and the EN54-2A17 power supply unit are both designed to supply the PVA-15CST call station of the PAVIRO by BOSCH.

This device should be used when the call station is installed at a considerable distance from the VAS power supply system, which may cause excessive voltage drops on power lines. The adapter allows the EN54-2A17 power supply to be connected to the MIC output used for connecting the call station. This power is supplied to the 1 (+ 24V) and 2 (GND) RJ45 connectors. The adapter should be mounted in the designated area of the power supply unit.

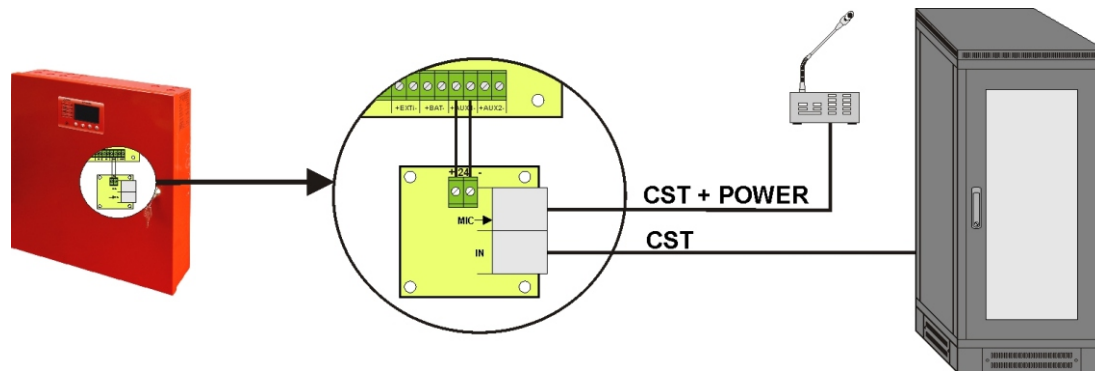

Technical parameters

Supply voltage	20÷30V DC
Connectors:	
- 24V	- $\Phi 0,51 \pm 2\text{mm}$ (AWG 24-12)
- MIC, IN	- RJ45 socket
Mounting	Standoffs x 4
Dimensions	52x46x18 [mm] WxHxD
Net/gross weight:	0,02kg / 0,04kg
Declarations, warranty	CE, RoHS, 2 years from the production date