
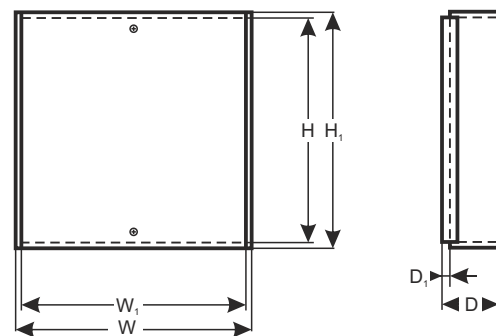


CODE: **AWO004** v1.8/VI
 NAME: **7/TRZ20/SATEL/GRADE3**

EN

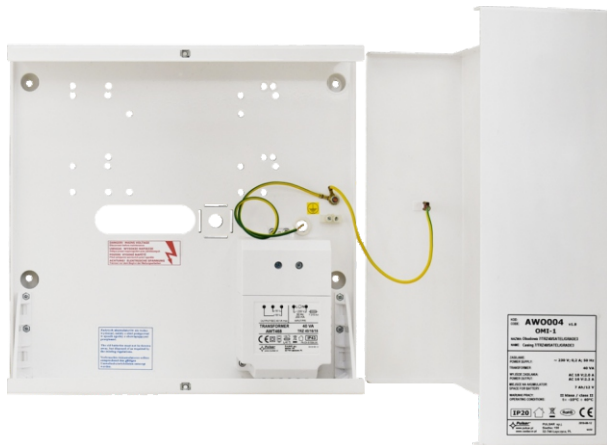

DESTINATION

SATEL: 1) CA 4V1, CA5, CA6, VERSA 5,10, VERSA PLUS, INTEGRA 24

MODULES: 1) CA64 (PP, EPS, ADR, O- R, O- ROC, O- OC, OPS- OC, OPS-R, OPS- ROC, VGM- 16, SR, PTSA, ACC- KP- PS)

TECHNICAL DATA

External dimensions of the enclosure:	W=290, H=280, D=105 D ₁ =15 [+/- 2mm]
External dimensions of the front panel:	W ₁ =285, H ₁ =285 [+/- 2mm]
Battery space:	7 Ah/12 V Sealed Lead Acid (SLA)
Weight net/gross:	3,30 / 3,50 [kg]
Transformer:	TRZ 40/16/18, norma EN 61558-2-6
Power supply:	230 V (-15%/+10%), 50 Hz, 120mA (max.)
Power supply output:	U1=16 V AC or U2=18 V AC (-5%, +15%), I1=2,2 A or I2=2,0 A (max.)
Operating environment:	class II, -10°C ÷ 40°C
Material description:	sheet steel DC01, thickness: 1,0mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	enclosure is equipped with set including mounting bracket with tamper
Closing:	screwed x 2, (screwed for front casing)
Notes:	optional: lockable, distance from wall (mounting surface) - 15mm, "C"- shaped doors and the bottom of the casing, customized enclosure
Declaration, warranty:	CE, CLC/TS 50131-3:2003, 2 year from the production date