


CODE: AWO005PU v.1.2/V
NAME: 7/20/SATEL/PUSTA

EN*

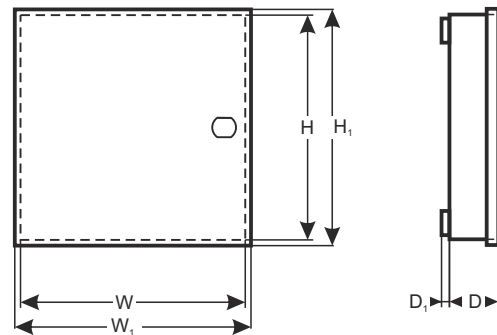

DESTINATION

SATEL:

Alarm control panels: Integra 24, Integra 32, Versa 5, Versa 10, Versa 15, Versa IP, Versa Plus, Perfecta16, Perfecta 32, Perfecta 32 LTE, Perfecta-T 32, Micra, CA-4 VP, CA-5 P, CA-6 P, CA-10-P.

Modules: ETHM-1 Plus, ETHM-2, INT-O, INT-PP, INT-R, INT-VMG, ACCO-NT, ACCO-KP-PS, ACCO-KPWG-PS.

Documentation shows which devices can be installed in a given enclosure. It does not define how many different devices can be installed in one enclosure. Number of installed devices depends on their size and arrangement

TECHNICAL DATA

External dimensions of enclosure:	W=250, H=252, D+D ₁ =81+8 [±2 mm]
External dimensions of front panel:	W ₁ =256, H ₁ =256 [±2 mm]
Net/gross weight:	1,348 / 1,500 [kg]
Space for battery:	7Ah/12 V Sealed Lead Acid (SLA)
Transformer:	without transformer – can be mounted in enclosure: TRP20, TRP40, TRZ40.
Operating conditions:	II environmental class, -10°C + +40°C
Material:	sheet steel DC01, thickness: 0,7mm, anticorrosion protection, color: RAL 9003
Destination:	inside
Tamper switch protection:	1 x microswitch: enclosure opening 0,5 A; 50 V DC max. NC – normally closed contacts Optionally: 1 x microswitch: detachment form wall, 0,5A; 50 V DC (required PKAZ066)
Closing:	screwed: screw x 4
Notes:	lock assembly possible, distance from the wall (mounting surface) – 8mm
Declaration, warranty:	CE, 2 years from production date