


CODE: **AWO102** v.1.0/l
 NAME: **7/25W/KS enclosure**

EN

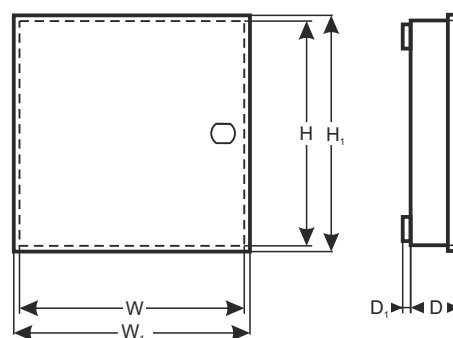

DESTINATION

Alarm control panels: Lares 16, Lares 16 IP, Lares 4.0 – 16, Lares 4.0 wls 96 Kit.

Modules: Auxi, Auxi Relay, Auxi 10in, BUS Switch, PSTN, Gemino BUS, 3G.

Documentation shows which devices can be installed in a given enclosure. It does not define how many different devices can be installed in one enclosure. Number of installed devices depends on their size and arrangement.

TECHNICAL DATA

Supply voltage	~ 100 – 240 V; 50/60Hz
Efficiency	83,5%
Output voltage	15 V DC / 1,7 A
Adjustable output voltage	13,5 – 16,5 V DC
Ripple voltage	120 mVp-p
Over voltage protection (OVP)	17,25 – 20,25 V DC
Overload protection OLP	110 – 180% PSU power, automatically recovered
Tamper switch protection	1 x microswitch: enclosure opening, 0,5 A; 50 V DC max. NC – normally closed contacts 1 x microswitch: detachment form wall, 0,5 A; 50 V DC max. NC – normally closed contacts
Operating conditions	-10°C ÷ +40°C, relative humidity 20%...90%, without condensation
Material	Sheet steel DC01, thickness: 0,7 mm, protection anticorrosion, color: RAL 9003
External dimensions of enclosure	W=250, H=292, D+D ₁ =81+8 [+/-2 mm]
External dimensions of front panel	W ₁ =256, H ₁ =296 [+/-2 mm]
Space for battery	7 Ah / 12 V (SLA)
Net/gross weight	1.7 / 1.9 [kg]
Destination	Inside
Closing	Bolted
Declarations, warranty	CE, 2 years from production date
Notes	Lock assembly possible MR008 / MR027, distance from wall (mounting surface) – 8mm