


CODE: **AWO152** v1.1/IV  
 NAME: **7/TRP40/PAR**

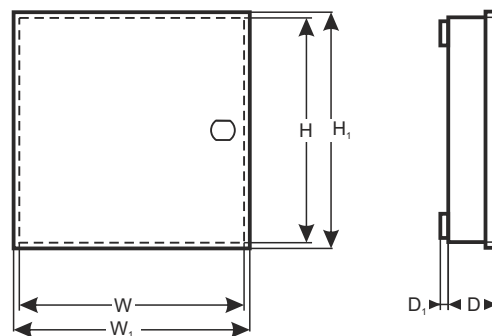

## DESTINATION

**CONTROL PANELS:** (728 ULT, E55, E65, SP4000, 5500, 6000, 7000, EV048, 192, MG5000, 5050, PS17, ACM12) +ZX8 ( 2xZX4, APR3- ADM2,APR3-HUB2, PGM4)

## DANE TECHNICZNE

<b>External dimensions of the enclosure:</b>	W=280, H=290, D+D1=80+8 [+/-2 mm]
<b>External dimensions of the front panel:</b>	W1=285, H1=295 [+/-2 mm]
<b>Battery space:</b>	7Ah/12 V Sealed Lead Acid (SLA)
<b>Weight net/gross:</b>	2,70 / 2,90 [kg]
<b>Transformer:</b>	TRP 40VA/16 V/18 V in the case of PC/ABC in class UL94-V0, IP30
<b>Power supply:</b>	230 V (-15%/+10%), 50 Hz, 200mA (max.)
<b>Power supply output:</b>	U1=16V/AC lub U2=18V/AC (-5%, +15%), I1=2,2 A lub I2=2,0 A (max.)
<b>Operating environment:</b>	class II, -10°C+ 40°C
<b>Material description:</b>	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
<b>Destination:</b>	indoor
<b>Tamper protection:</b>	1 x opening casing, wall tamper, 0,5 A@50 V DC max. NC- contacts
<b>Closing:</b>	screwed x 4
<b>Notes:</b>	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal, anten holes for MAGELLAN (antennas), <b>customized enclosure: minimum order quantity 100pcs.</b>
<b>Declaration, warranty:</b>	CE, 2 year from the production date