


CODE: **AWO152PU** v.1.2/IV
 NAME: **7/40/PAR/EMPTY**

EN

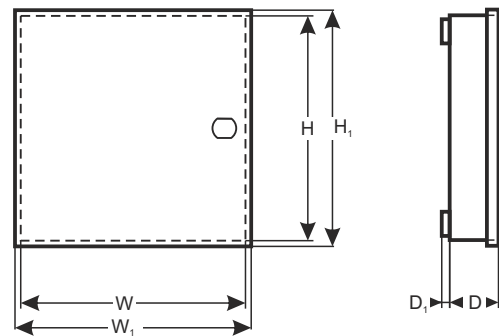

DESTINATION

PARADOX: (728 ULT, E55, E65, SP4000, 5500, 6000, 7000, EV048, 192, MG5000, 5050, PS17, ACM12)
 +ZX8 (2xZX4, APR3- ADM2,APR3-HUB2, PGM4)

TECHNICAL DATA

External dimensions of the enclosure:	W=280, H=290, D+D1=80+8 [+/-2 mm]
External dimensions of the front panel:	W1=285, H1=295 [+/-2 mm]
Battery space:	7Ah/12 V Sealed Lead Acid (SLA)
Weight net/gross:	1,32kg / 1,50 [kg]
Transformer:	without transformer - can be mounted in the casing: TRP20, TRP40, TRZ20, TRZ40
Operating environment:	class II, -10°C + 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5 A@50 V DC max. NC - contacts
Closing:	screwed x 4
Notes:	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal, anten holes for MAGELLAN (antennas), customized enclosure: minimum order quantity 100pcs.
Declaration, warranty:	CE, 2 year from the production date