


CODE: **AWO205PU v.1.2/IV**  
 NAME: **17/40/SATEL/PUSTA**

EN

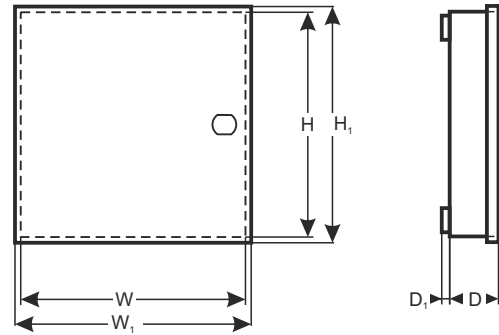

## DESTINATION

### 7Ah:

- 1) CA4V1, 5, 6, 10, VERSA 5, 10, 15, INTEGRA 24, 32 + 3 x CA10E ( CA64E, SM, MST1)
- 2) CA4V1, 5,6,10, VERSA 5,10,15, INTEGRA 24, 32 + CA10E ( CA64E, SM, MST1) + GSMLT1
- 3) CA4V1,5,6,10, VERSA 5,10,15, INTEGRA 24, 32 + CA10E ( CA64E, SM, MST1) + CA64 ( EPS, ADR, O-R, O-ROC, O-OC, VGM- 16, SR, ACC- KP-PS)
- 4) INTEGRA 64, 128

### MODULES:

- 1) CA64 ( PP, EPS, ADR, O- R, O-ROC, O-OC, OPS- OC, OPS- R, OPS- ROC, VGM- 16, SR, PTSA, ACC-KP-PS) + 3 x CA10E ( CA64E, SM, MST1)

### 17Ah:

- 1) CA4V1, 5,6, 10, VERSA 5,10,15, INTEGRA 24, 32 + 2 x CA10E ( CA64E, SM, MST1)
- 2) CA4V1, 5,6,10, VERSA 5,10,15, INTEGRA 24, 32 + GSMLT1
- 3) CA4V1, 5,6,10, VERSA 5,10,15, INTEGRA 24, 32 + CA64 (EPS, ADR, O- R, O-ROC, O-OC, VGM-16, SR, ACC- KP- PS)

### MODULES:

- 1) CA64 ( PP, EPS, ADR, O-R, O-ROC, O-OC, OPS- OC, OPS- R, OPS- ROC, VGM-16, SR, PTSA, ACC- KP-PS) + 2x CA10E (CA64E, SM, MST1)

## TECHNICAL DATA

<b>External dimensions of the enclosure:</b>	W=320, H=305, D+D <sub>1</sub> =90+8 [+/-2 mm]
<b>External dimensions of the front panel:</b>	W <sub>1</sub> =325, H <sub>1</sub> =310 [+/-2 mm]
<b>Battery space:</b>	17Ah/12V Sealed Lead Acid (SLA)
<b>Weight net/gross:</b>	1.93 / 2.20 [kg]
<b>Transformer:</b>	without transformer - can be mounted in the casing: TRP20, TRP40, TRZ40
<b>Operating environment:</b>	class II, -10°C+ 40°C
<b>Material description:</b>	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
<b>Destination:</b>	indoor
<b>Tamper protection:</b>	1 x microswitch: opening, 0,5 A@50 V DC max. NC - normally closed contacts
<b>Closing:</b>	sheet-metal screws x 4
<b>Notes:</b>	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal hole for pigtail (LT-1x antenna)
<b>Declaration, warranty:</b>	CE, 2 year from the production date