


CODE: **AWO359** v1.2/III
 NAME: **LED/B-M**

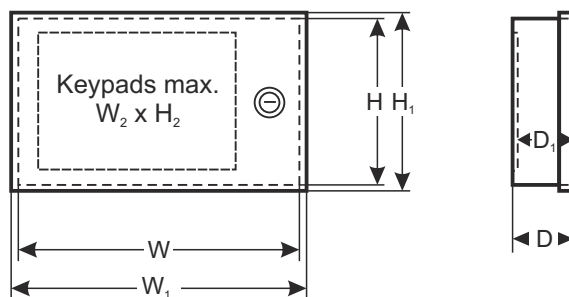

DESTINATION

SATEL

KEYPADS: CA-5 KLED-S, CA-6 KLED-S, CA-10 KLED-S, INTEGRAS, (CZ-EMM)

PARADOX

KEYPADS: LED 616

PYRONIX

KEYPADS: FP 12030 MX-ICON 9 (LCD)

TECHNICAL DATA

External dimensions of the enclosure:	W=140, H=135, D=42 [+/- 2mm]
External dimensions of the front panel:	W ₁ =147, H ₁ =140 [+/- 2mm]
Keyboard mounting dimensions:	W ₂ =85, H ₂ =130, D ₁ =32 [+/- 2mm]
Weight net/gross:	0,60kg / 0,65kg [+/-0,1kg]
Operating environment:	class II, -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5 A@50 V DC max. NC- contacts
Closing:	lockable (various code, two keys included)
Notes:	removable back mounting plate
Declaration, warranty:	RoHS, 2 year from the production date