


CODE: **AWO360** v1.2/III  
 NAME: **LCD/B SATEL/W**

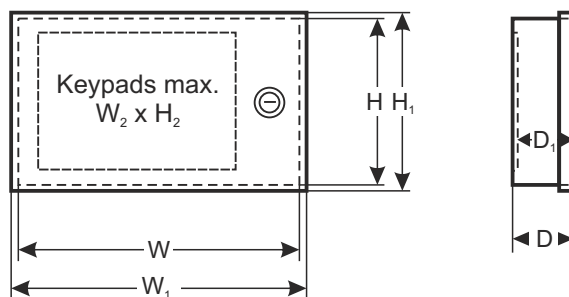

## DESTINATION

### SATEL

KEYPADS: CA-5 KLCD-L, CA-10 KLCD-L, CA-64 KLCD-L, INTEGRA KLCD (KLCD-R), CA-4V KLED, CA-6 KLED, CA 10 KLED, CA-64 S, CA-64 SZ, SZW-02

### PARADOX

KEYPADS: DIGIPLEX DGP-641 LCD, DGP-610 LED, DGP-620 LED, SPECTRA 1686 V (696)

### GALAXY KEYPADS: MK-5 (CP-25)

VISONIC KEYPADS: KP-1002LCD, 1001/8LED, 1001/16LED

PYRONIX KEYPADS: MATRIX LCD FP 12610.

### CADDX NETWORK

KEYPADS: NX-148E(LCD), NX-1348E (LCD- ikona), NX-108E, NX-116E, NX-124E (LED)

ROKONET KEYPADS: PROSYS LCD, RP 128 KLC

ELKRON KEYPADS: KP100D, KP100, KP200D, KP106

ADEMCO KEYPADS: AD6139

PIMA KEYPADS: RX-400

FBII KEYPADS: OMNIKPLCD

## TECHNICAL DATA

External dimensions of the enclosure:  $W=215$ ,  $H=149$ ,  $D=50$  [ $\pm 2$ mm]

External dimensions of the front panel:  $W_1=223$ ,  $H_1=158$  [ $\pm 2$ mm]

Keyboard mounting dimensions:  $W_2=160$ ,  $H_2=145$ ,  $D_1=42$  [ $\pm 2$ mm]

Weight net/gross: 0,80kg / 0,90kg [ $\pm 0,1$ kg]

Operating environment: class II,  $-10^\circ\text{C}$  +  $40^\circ\text{C}$

Material description: sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003

Destination: indoor

Tamper protection: 1 x microswitch: opening, 0,5 A@50 V DC max. NC- contacts

Closing: lockable (various code, two keys included)

Notes: removable back mounting plate (without holes)  
 keypad status preview - inspection window

Declaration, warranty: RoHS, 2 year from the production date