


CODE: **AWT682** v 1.0/XII  
NAME: **TRANSFORMER TRZ 60VA/18V/20V**

EN

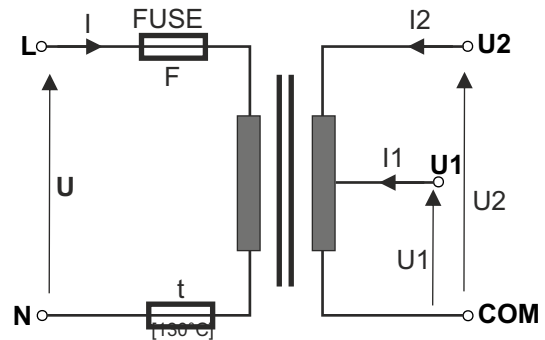

**Technical data of transformers: TRZ**  
**Tab. 1**

CODE NAME	S	U	I	U1 or U2	I1 or I2	F	t
<b>AWT682</b> <b>TRZ 60/18/20</b>	60VA	230 V AC	0,33A	18 V or 20 V	3,3A or 3,0A	T 500mA/250V	130°C

### DESTINATION

The transformers are destined for supplying devices requiring AC voltage U1 or U2.

### TECHNICAL DATA

<b>Enclosure:</b>	PC/ABS in class UL 94 V-0, IP43
<b>Dimensions:</b>	Fig.1 TRZ 60
<b>Net/gross weight:</b>	1,37 / 1,40 [kg] TRZ 60
<b>Installation:</b>	- to be mounted on a flat surface, cheese head screws required x4 - for mounting on a DIN rail, required bracket: DIN2 - dedicated to SATEL's enclosures: OPU3-P/OPU4-P/OPU4-PW
<b>Supply voltage:</b>	230 V AC (-15%+10%), 50Hz
<b>Current consumption I:</b>	tab.1.
<b>Output voltage U1 or U2:</b>	tab.1.
<b>Rated power S:</b>	tab.1.
<b>Rated output current I1 or I2:</b>	tab.1.
<b>Short-circuit protection F:</b>	glass fuse tab.1.
<b>Over-load protection t:</b>	glass fuse tab.1. / thermal fuse 130°C (non-returnable)
<b>Operating conditions:</b>	II environment class, -10°C – +40°C, Ta 40B
<b>Declarations, warranty:</b>	CE, 2 years
<b>Notes:</b>	leads on connectors AWG 24-12 2,5mm <sup>2</sup> , kit for mounting (screw for plastics 4,1x20 – 3szt.; sheet metal screws 2,9 x 9,5 – 4 pcs. and plugs)

Dimensions of transformers series: TRZ20.../TRZ 60VA..

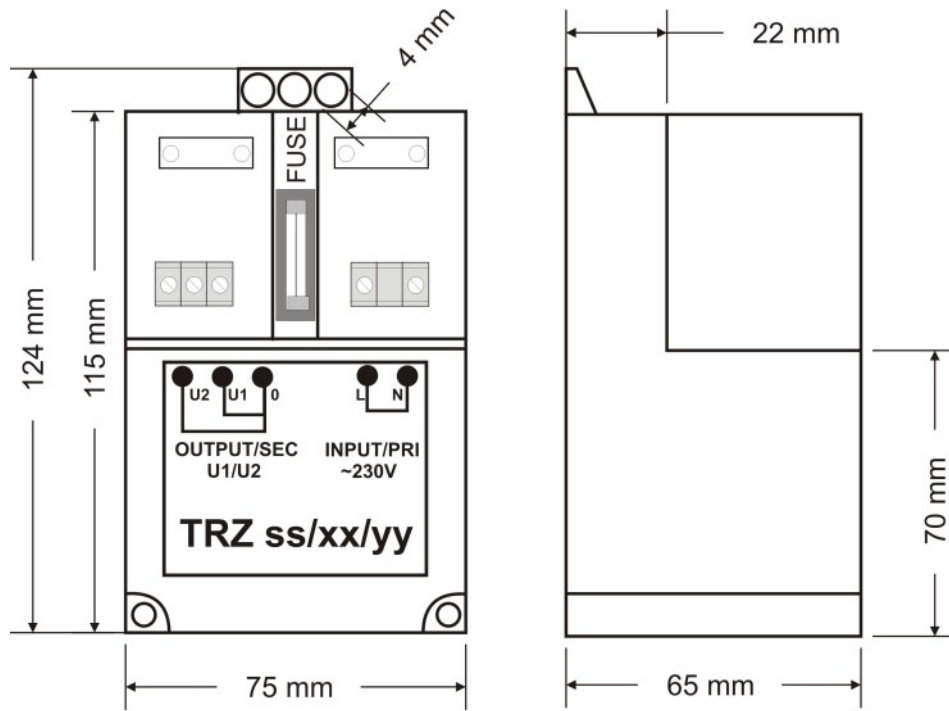


Fig.1