


CODE: **EXT-POEG3-OTD** v.1.0/1  
NAME: **Extender EXT-POEG3-OTD**

EN

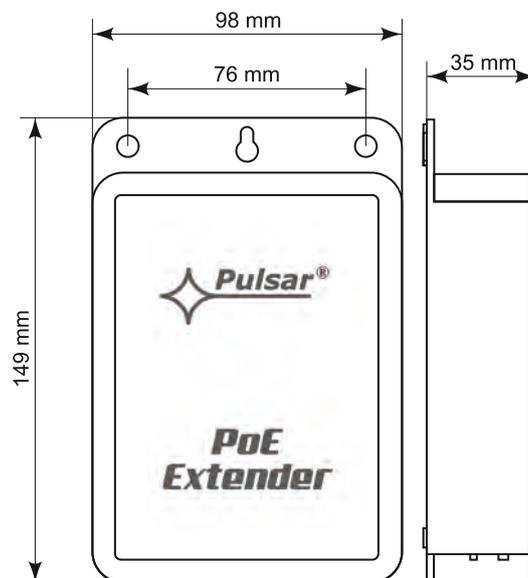

#### Device features:

- Voltage adjustment range 48 – 57 V DC
- Power supply from PoE switch
- PoE input: PoE IN - compliant with IEEE802.3af/at/bt
- PoE output PoE OUT 1 – 3 - compliant with IEEE802.3af/at
- Increases Ethernet and PoE power range by 100 meters
- Supports 10/100/1000 Mb/s networks
- LED optical signalization
- VLAN mode
- Protections:
  - OLP overload protection
  - SCP short circuit protection
- Warranty: 2 years

#### DESCRIPTION

**EXT-POEG3-OTD** extender is a device designed to extend transmission distance of PoE power and Ethernet data via UTP cat. 5/5e twisted pair cable to next 100m. Extender is powered from PoE switch or other PoE-compliant device (PoE IN input). Output voltage and data are available at PoE OUT PoE OUT 1 – 3 outputs, to which cameras or other IP devices using PoE power should be connected.

**TECHNICAL DATA**

Power supply	Compliant with 802.3af/at/bt (48 – 57 V DC)
Current consumption by PSU module systems	<20mA
Module power	25 W max.
Ports	4 ports 10/100/1000 Mb/s (1 x PoE IN + 3 x PoE OUT) with auto negotiation of connection speed, auto MDI/MDIX crossover
Output voltage	Compliant with 802.3af/at
Output current	0,5A/port ( $\Sigma=0,5A$ max.)
PoE IN input power supply pairs	1/2 (+) 3/6(-) 4/5 (+) 7/8 (-)
PoE OUT 1 – 4 input power supply pairs	1/2 (+) 3/6(-) 4/5 (+) 7/8 (-)
Overload protection (OLP) Short circuit protection (SCP)	105% – 150% of power supply, automatic recovery
LED operation indication	LEDs: green <b>1 – 4 ports:</b> On - the device is connected 10/100/1000 Mb/s Blinking - data transmission <b>Power supply:</b> ON - the device is powered OFF - power fail
Operating conditions	-10°C – 50°C
Dimensions (LxWxH)	98 x 35 x 149 [+/- 2mm]
Installation	Mounting screws x2 (76mm spacing)
Connectors: - Input/output PoE	RJ45 8P8C
Net/gross weight	0,16 / 0,19 [kg]
Storage temperature	-20°C...+60°C
Declarations, warranty	CE, RoHS, 2 years

**Example of use:**

