

CODE: **PSCL12010**
TYPE: **PSCL 12V/1A switch mode power supply**

EN/III

Features of the power supply unit:

- power output 1 A/12 V DC*
- universal AC input voltage range 90÷264 V
- high efficiency 80%
- standby power <0,3W
- efficiency level: V
- IP 67 case
- protections:
 - SCP short-circuit protection
 - overvoltage protection (AC input)
 - overload (OLP)
- warranty – 2 year from the production date




DESCRIPTION

Stabilized DC power supply is intended for supply equipments that require stabilised voltage of **12 V DC**. The power supply unit is protected against short-circuit, overload and overvoltage.

SPECIFICATIONS.

Supply voltage	90 ÷ 264 V AC 50÷60Hz
Current consumption	0,15 A@ 230 V max.
Supply power	12 W max.
Efficiency	80%
Output voltage	12 V DC
Output current t_{AMB}<30°C	1 A - refer to graph 1.
Output current t_{AMB}=40°C	0,7 A - refer to graph 1.
Ripple voltage	100mV p-p max.
Short-circuit protection SCP	electronic, automatic recovery
Overload protection OLP	150-200% of power supply, automatic recovery
IP protection class	IP67
Operation conditions	temperature -10 °C÷40 °C relative humidity 20%...90% without condensation
Dimensions (LxWxH)	67 x 37 x 25 [mm]
Net/gross weight	0,12kg / 0,15kg
Protection class EN 60950-1:2007	II (second)
Lenght of DC cable	0,5 m + DC plug 5,5 / 2,1 female
Lenght of AC cable	0,3 m
Storage temperature	-20°C...+60°C

* In order to extend the life of the power supply, the load current of 0,7 A is recommended.

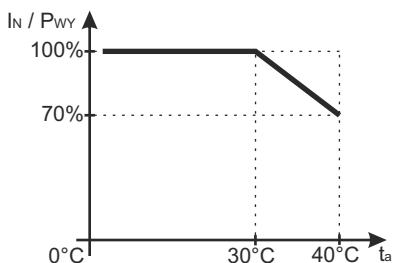

Graph 1.
Relation between output current and ambient temperature (instantaneous load).


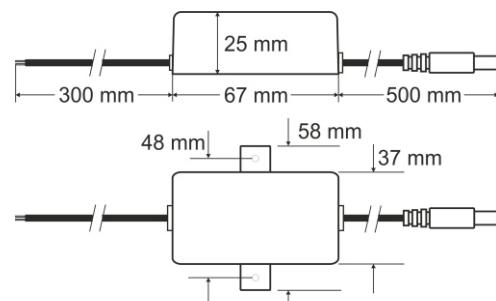


Fig.1 Dimension of power supply.

ACCESORIES

ACCESORIES:
[1] adapter CABLE - PLUG DC 5,5/2,1 - code ML109

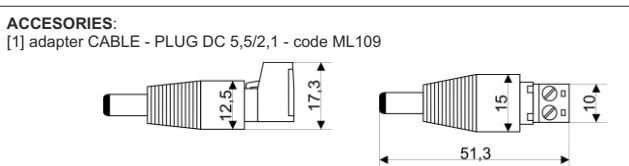

For power supplies are available accessories - fuse blocks and cable adapter. For details -visit www.pulsar.pl.

* Refer to graph 1