


PSDC/T series power supply unit

Power supply 12V DC for up to 9 HD cameras



CODE: **PSDC09125T** v.1.0/VI
TYPE: **PSDC 12V/5A/9x0,5A/TOPIC** power supply for up to 9 HD cameras

EN

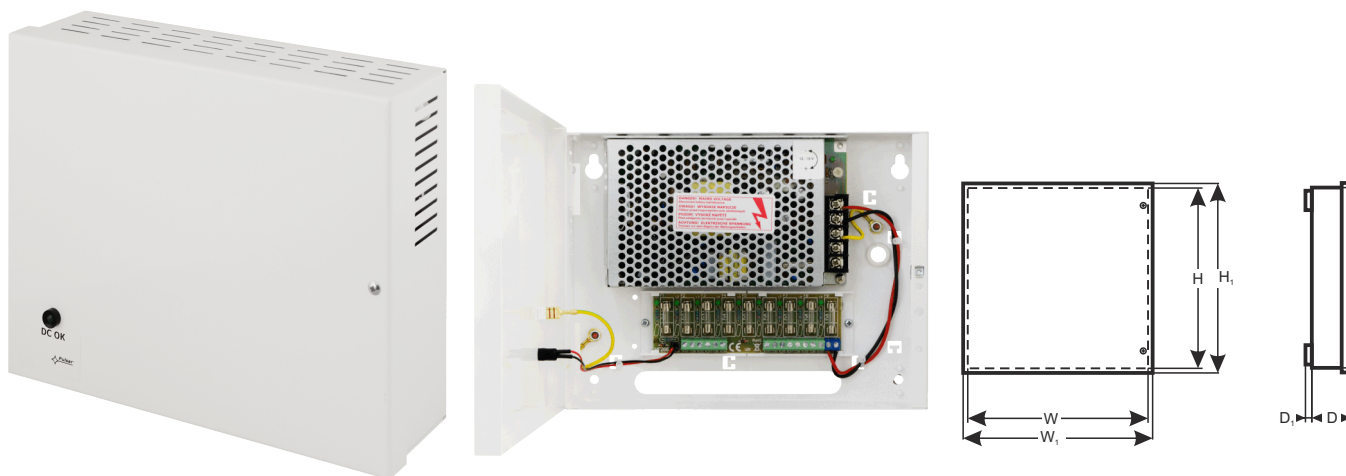

Features:

- the 9x0,5A/12VDC power output for powering 9 HD cameras
- output voltage adjustment 12V÷15V DC
- 9 outputs, protected with 0,5A fuses
- wide range of supply voltage 85÷264V AC
- high efficiency 80%
- LED indication
- protections:
 - SCP short-circuit protection
 - OVP over voltage protection
 - surge protection
 - OLP overload protection
- warranty – 2 year from the production date

DESCRIPTION

The stabilized PSU **PSDC09125T** stabilized power supply is designed to supply HD cameras or other devices requiring stabilized voltage of **12V DC**. The output voltage adjustment range is adjusted via a potentiometer within the range of **12V ÷ 15V DC**. The PSU features 9 outputs protected independently by glass fuses. A failure (a short circuit) in the output circuit makes a fuse blow or an activation of the polymer fuse and disconnection of the circuit from the DC power supply (+U). The PSU is housed in a metallic enclosure with an indication panel.

PSDC/T series power supply unit

Power supply 12V DC for up to 9 HD cameras



SPECIFICATIONS	
Power supply	85 ÷ 264V AC
Current consumption	0,6A @230VAC max.
PSU power	60Wmax.
Efficiency	80%
Output voltage	12V DC
Output current	9x 0,5A max. @12V
Output voltage adjustment range	12V± 15V DC
Ripple voltage	100mV p-p max.
Short-circuit protection SCP	LB9 STRIP 9x F 0,5A fuse PSU MODULE 105% ÷ 150% of PSU power, electronic current limiting
Overload protection OLP	105% ÷ 150% of PSU power, electronic current limiting
Surge protection	varistors
Overvoltage protection OVP	>16V (automatic recovery)
LED indication	LEDs
Operating conditions	2nd environmental class, temperature: -10 °C÷50 °C, relative humidity 20%...90%, without condensation
Enclosure	Steel plate DC01 0,7mm thick, colour: RAL9003
Dimensions	W=230, H=177, D+D ₁ =52+8 [+/- 2 mm] W ₁ =234, H ₁ =181 [+/- 2 mm]
Net/gross weight	1,3/1,4 kg
Closing	Cheese-head screw: at the front
Declarations, warranty	CE, 2 year from the production date
Notes	The enclosure does not adjoin the assembly surface so that cables can be led. Convictional cooling.