

PSDCSEP series power supply unit


Power supply 12V DC for up to 8 HD cameras, adjustable for each channel



CODE: **PSDCSEP08128** v.1.0/1

EN**

TYPE: **PSDCSEP 12V/8A/8x1A/TOPIC** Power supply for up to 8 HD cameras, adjustable for each channel.

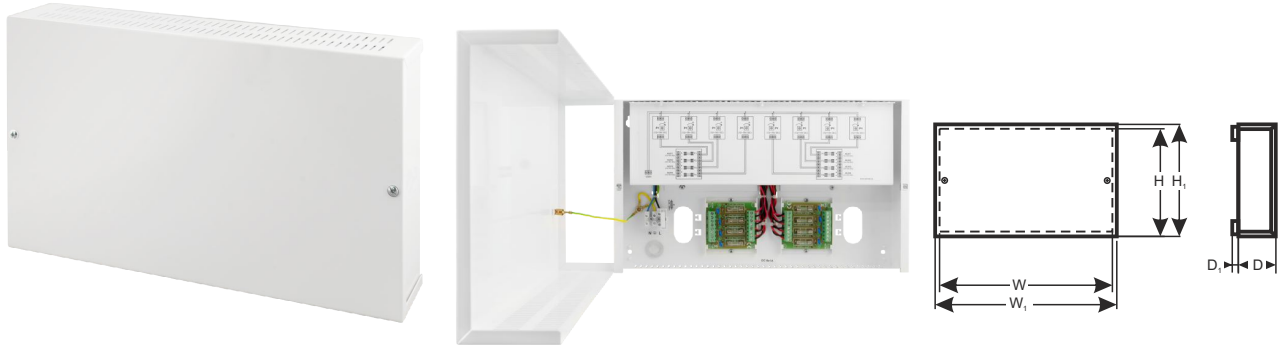

Features:

- the 8x1A/12V DC power output for powering HD cameras
- output voltage adjustment 12V±15VDC
- wide range of supply voltage 85±264VAC
- 8 independent, galvanically separated outputs
- 8 outputs protected independently by 1A fuses
- high efficiency 81%
- protections:
 - SCP short-circuit protection
 - OVP over voltage protection
 - surge protection
 - OLP overload protection
- warranty – 2 year from the production date

DESCRIPTION

The **PSDCSEP08128** stabilized power supply is designed to supply HD cameras or other devices requiring stabilized voltage of **12V DC**. The power supply has 8 independently adjustable channels with selectable voltages in the range **12V±15V DC / 8x1A**, thus compensating voltage drops in large CCTV installations. Power supply outputs are galvanically separated and protected by fuses. A failure (short circuit) in the output circuit will cause the fuse to blow and disconnect the circuit from DC power (+ U).

PSDCSEP series power supply unit

Power supply 12V DC for up to 8 HD cameras, adjustable for each channel



SPECIFICATIONS	
Power supply	85 ÷ 264V AC
Current consumption	2A@230V AC max.
PSU power	96W max.
Efficiency	81%
Output voltage	12V DC
Output current	8x1A ($\Sigma I = 8A$) max. @12V
Output voltage adjustment range	12V÷15V DC
Ripple voltage	120mV p-p max.
Short-circuit protection SCP	2xLB4/SEP STRIP 8x F 1A fuse TOPIK PSU MODULE 105% ÷ 150% of PSU power, electronic current limiting
Overload protection OLP	105% ÷ 150% of PSU power, electronic current limiting
Surge protection	varistors
Surge over voltage protection OVP	17,25 – 20,25V (automatic recovery)
F1÷ F8 fuses	F 1A/250V
Operating conditions	2nd environmental class, temperature: -10 °C÷40 °C, relative humidity 20%...90%, without condensation
Enclosure	Steel plate DC01 0,7mm thick, colour: RAL9003
Dimensions	W=365, H=215, D+ D ₁ =72+8 [+/- 2mm] W ₁ =370, H ₁ =220 [+/- 2mm]
Net/gross weight	4,2/4,4 kg
Closing	Cheese-head screw x 2: (at the front)
Declarations, warranty	CE, RoHS, 2 year from the production date
Notes	The enclosure does not adjoin the assembly surface so that cables can be led. Convectonal cooling.