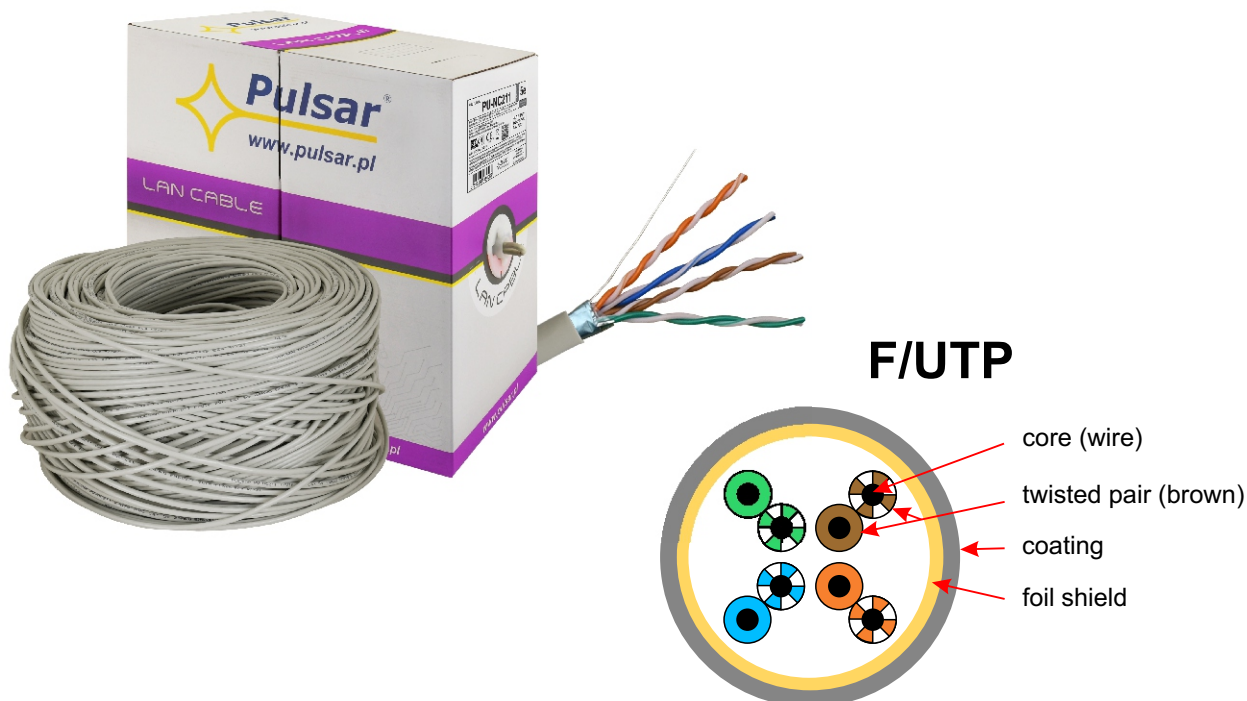


CODE: **PU-NC211** v1.0/I

EN

NAME: **Shielded twisted pair wire, F/UTP, PVC, cat 5e, 24AWG, Cu, Eca, 305m (indoor)**

DESTINATION

PU-NC211 is shielded twisted pair wire F/UTP, category 5e for data and power transmission (PoE). It can be used in many systems, i.e. ICT systems, IP video monitoring systems (especially recommended for IP PoE systems), but it will also work well in HD digital closed-circuit television systems (CVI, TVI, AHD). Cable is intended for professional installations inside buildings and complies with the EN 50575 (CPR) standard.

TECHNICAL DATA

Type of cable:	Twisted pair wire
Shield type / Shielding:	F/UTP (shielded wire)
Category:	5e
Outside diameter of wire / core:	6,2mm / 0,5mm (AWG24)
Coating/core material:	PVC (polvinite) / Cu (99,99%)
Coating colour:	Grey-beige - RAL7032
Reaction to fire class:	Eca
Destination:	indoor
Operating temperature:	20°C+70°C
Laying temperature:	0°C+50°C
Bending radius:	40mm
Cable length in package:	305m
Type / dimensions of packaging:	Cardboard / 410 x 210 x 410 [+/- 2mm]
Net / gross weight:	11,8 / 12,7 [kg]
Declaration, warranty:	CE, CPR, DoP, 5 years
Notes:	marker on cable every 1m