
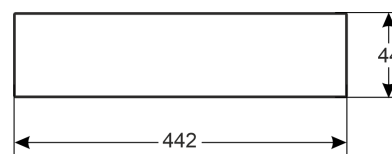


Code: **SFG120WP-BT** v.1.0 / I

Name: **SFG120WP-BT 20-port PoE switch without power supply for 16 IP cameras**

EN

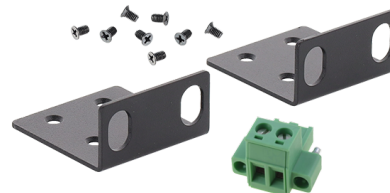

Destination

SFG120WP-BT is a 20-port PoE switch designed to supply IP cameras operating in the IEEE 802.3af/at/bt standard. Automatic detection of any devices powered in the PoE/PoE+ standard is enabled at the 1 - 16 ports of the switch, and HiPoE for ports 1-4. The ports marked TP/17-20 are used to connect additional network devices via an RJ45 connector. Switch also has four SFP sockets (marked SFP/17-20), which after using SFP modules (GBICs) enable fiber optic transmission.

Technical data:

Power supply:	48 - 54 V DC, detachable power socket power supply unit is not included
Ports:	20
PoE ports:	16 x 1 Gb/s - IEEE 802.3af/at - IEEE 802.3af/at/bt, PoE+, PoE++ 52V DC, 30W/port, 60W/port, max.240W Tryb Long Range: OFF - 100m/1Gb/s or ON - 250m/10Mb/s (9÷16 ports) VLAN Storm control
UPLINK ports RJ45:	4 x 1 Gb/s - TP/17-20
SFP UPLINK sockets:	4 x 1 Gb/s - SFP/17-20 17/TP i 17/SFP 20/TP i 20/SFP - nie mogą pracować jednocześnie - typ COMBO
Dimensions:	442 x 44 x 270 [mm, +/-2]
Installation:	standard / RACK 19"
Indication:	LED optical indication
Notes:	additional mounting elements - mounting brackets for RACK
Warranty:	2 years
Declaration:	CE

Features

- Switch 20 ports
- 16 ports PoE 10/100/1000 Mb/s (data transfer and power supply)
- 4 ports 10/100/1000 Mb/s (porty TP/17-20) (Uplink)
- 4 ports 1000 Mb/s (porty SFP/17-20) (Uplink)
- 60 W for ports 1-4, supports devices compliant with IEEE802.3af/at/bt standard (HiPoE)
- 30 W for ports 5-16, supports devices compliant with IEEE802.3af/at standard (PoE+)
- Supports auto-learning and auto-aging of MAC addresses (8K size)
- Optical indication
- Function switch:
 - LongRange
 - VLAN
 - StormControl
- Additional mounting elements
- Warranty – 2 years

Destination

