
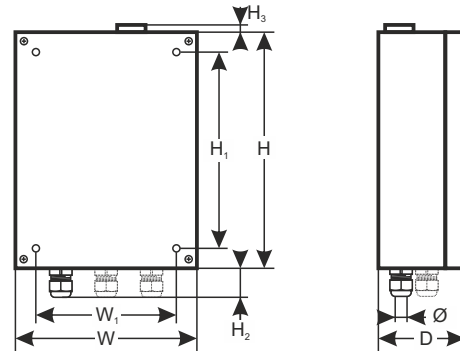


SG54H 5-port switch with power supply for 4 IP cameras in hermetic enclosure

CODE: **SG54H** v1.0/I
NAME: **SG54H 5-port switch with power supply for 4 IP cameras in hermetic enclosure**

EN

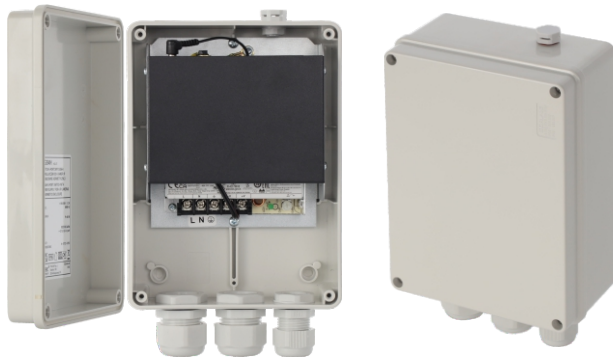

Features:

- 5 ports switch
- 4 PoE ports 10/100/1000 Mb/s (data transfer and power supply)
- 1 port 10/100/1000 Mb/s (UpLink)
- 30 W for each PoE port, supports devices compliant with the IEEE802.3af/at (**PoE+**) standard
- Supports auto-learning and auto-aging of MAC addresses (1K size)
- Pole mounting option (requires OZB2 adapter - **optional accessory**)
- Protections:
 - SCP short circuit protection
 - OLP overload protection
 - surge protection (AC input)
- LED indication
- Warranty – 1 year

DESCRIPTION

SG54H is a 5-ports PoE switch designed to supply IP cameras operating in IEEE 802.3af/at standard. Automatic detection of any devices powered in the PoE/PoE+ standard is enabled at the 1 – 4 ports of the switch. The UpLink ports is used for connection of another network device via RJ45 connector. The LEDs at the front panel indicate the operation status (description in the table below).

The PoE technology ensures a network connection and reduces installation costs by eliminating the need to supply a separate power cable for each device. This method allows supplying other network devices, such as IP phone, wireless access point or router.


SPECIFICATIONS

Ports	5 ports 10/100/1000 Mb/s (4 x PoE + UpLink) with auto negotiation of connection speed, auto MDI/MDIX crossover
PoE supply	IEEE 802.3af/at (1+4 ports), 52 V DC / 30 W at each port *
PoE power budget	60 W
Protocols and standards	IEEE802.3, 802.3u, 802.3x CSMA/CD, TCP/IP
Transmission method	Store-and-Forward
LED operation indication	Switch supplying; Link/Act; PoE Status
Short circuit protection (SCP)	electronic, automatic recovery
Overload protection (OLP)	110% – 150% PSU power, automatically recovered
Power supply	~100 – 240 V; 50/60 Hz; 1,2 A
Fuse F _{MAINS}	T3,15A/250V
Operating conditions	Temperature: -25°C...+50°C, relative humidity 20%...90%, without condensation
External dimensions	W=146, H=196, D=78 [+/- 2 mm]
Mounting dimensions	W ₁ =105, H ₁ =155 [+/- 2 mm]
Cable gland height	H ₂ =35 mm
Dimensions of pressure compensator	H ₃ =9 [mm]
Number of cable glands/cable diameter	2 pc. / 13 – 18 mm + 1 pc. / 10 – 14 mm
Gland filling inserts	3x Ø5mm (1 pc.) 2x Ø5mm (1 pc.)
Enclosure	ABS, light grey
Net/gross weight	1,4 / 1,5 [kg]
Protection class EN 62368-1	I first
Protection grade EN 60529	IP56
Storage temperature	-25°C...+60°C
Declarations, warranty	CE, 1 year
Notes	Possibility of pole mounting (requires the OZB2 adapter - optional accessory)

* Given value of 30 W per port is the maximum value. The total power consumption should not exceed 60 W.



Example of installation

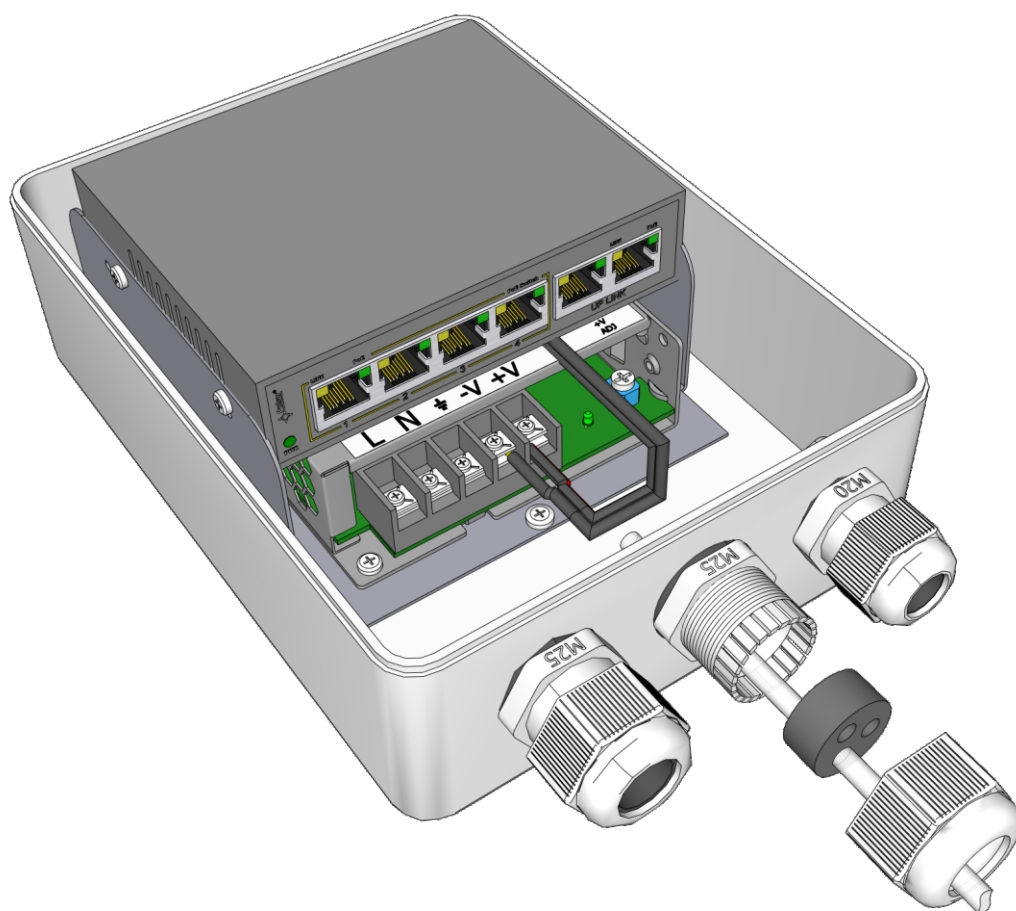

Example connection diagram

