


Code: **SP-POE20G v.1.0 / I**
Name: **Splitter PoE SP-POE20G**

EN

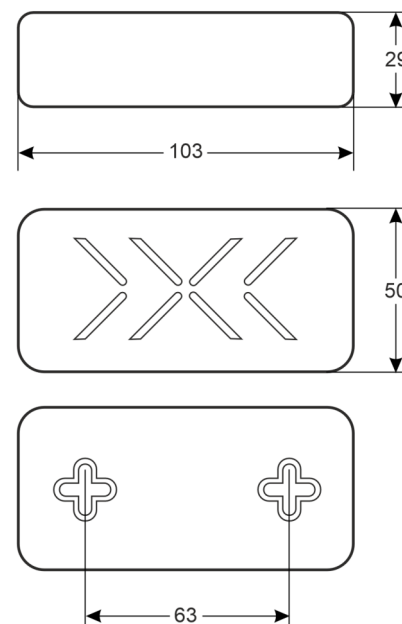

TECHNICAL DATA

Dimensions:	103 x 29 x 50 [mm, +/-2]
Power supply:	44 - 57 V DC
Power supply output:	1.7 A / 5 V DC or 1.7 A / 12 V DC the selection of output voltage using a switch
Input connector:	Data: RJ45 socket for twisted pair cable: RJ45 socket (TCP IP and power supply)
Output connector:	Power supply: DC5,5/2,1 outlet Data: RJ45 socket
Efficiency:	86%
Protections:	SCP, OLP, OHP
Indication:	LED optical indication
Warranty:	2 years
Notes:	designed for use in 10/100/1000 Mb/s networks operation with PoE switches (standard PoE - IEEE802.3af/at) operation with passive PoE switches (supplied pairs: 4/5 and 7/8)
Declaration:	CE

