Pulsar®
www.pulsar.pl

EN

Code: **SP-POE60G** *v.1.0 / I*

Name: **Splitter PoE SP-POE60G**

360°
360 product photos

80 mm
50 mm
35 mm
100 mm
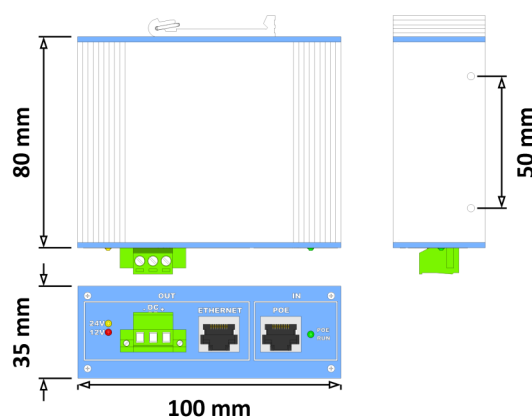
TECHNICAL DATA

Dimensions:	100 x 100 x 35 [mm, +/-2]
Power supply:	44 - 57 V DC
Power supply output:	5 A / 12 V DC
Input connector:	Data: RJ45 socket for twisted pair cable: RJ45 socket (TCP IP and power supply)
Output connector:	Power supply: detachable power socket Data: RJ45 socket
Efficiency:	93%
Protections:	SCP, OLP
Installation:	DIN
Indication:	LED optical indication
Warranty:	2 years
Notes:	designed for use in 10/100/1000 Mb/s networks operation with PoE switches (standard PoE – IEEE802.3af/at/bt) operation with passive PoE switches (supplied pairs: 4/5 and 7/8)
Declaration:	CE

Tel. +48-14-610-19-45
www.pulsar.pl
e-mail: sales@pulsar.pl

Facebook   Linkedin   YouTube   Pulsar.pl