


Code: **USF1816P** v.1.0 / II
Name: **Ultralink FastEthernet Switch, 16xPoE+, 2xUpLink**

EN

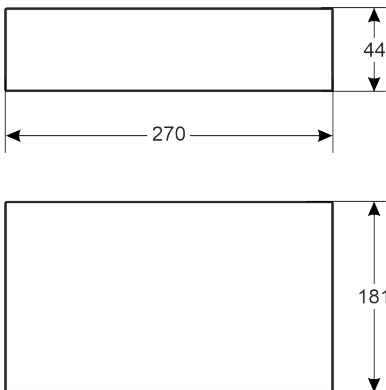

Destination

The PoE is designed for use with devices comply with the IEEE 802.3af/at standard, providing power and data transmission via an Ethernet cable (Cat. 5 or higher). PoE technology ensures communication between the switch and the connected device, which allows power only standards-compliant equipment, considering the power requirements. Moreover, the switch is equipped with additional functions such as Watchdog and a LongRange mode for connecting devices up to 200m away.

Technical data:

Power supply:	100 - 240 V AC desktop: 160 W / 3 A
Ports:	18
PoE ports:	16 x 10/100 Mb/s - IEEE 802.3af 52V DC, 30W/port, max.160W Long Range mode: OFF - 100m/100 Mb/s or ON - 200m/10 Mb/s (9÷16 ports)
UPLINK ports RJ45:	2 x 1 Gb/s
Dimensions:	270 x 44 x 181 [mm, +/-2]
Installation:	standard / RACK 19"
Indication:	LED optical indication
Notes:	watchdog function additional mounting elements - mounting brackets for RACK
Warranty:	2 years
Declaration:	CE

Features

- 18 ports switch
- 16 PoE ports 10/100 Mb/s (data and power supply)
- 2 ports 10/100/1000 Mb/s (G1/G2 ports) (UpLink)
- Long Range mode (up to 200m)
- 30W dla każdego portu PoE, obsługa urządzeń zgodnych ze standardem IEEE 802.3af/at (PoE+)
- Supports auto-learning and auto-aging of MAC addresses (16K size)
- Zasilacz typu desktop PSD520300 52 V DC/3 A/160 W max. w zestawie
- Additional functions:
 - Watchdog
- Optical indication
- Additional mounting elements
- Warranty – 2 years

Destination

