



CODE: **ARAD2N** v.1.0/I
 NAME: **RACK 2U/400mm universal enclosure for RACK 19" cabinets**


EN

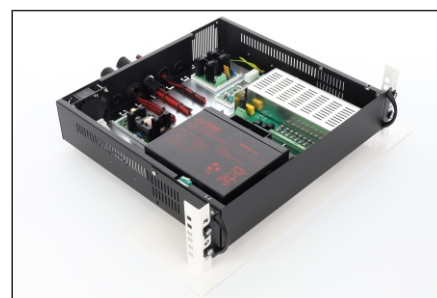

Front mounting

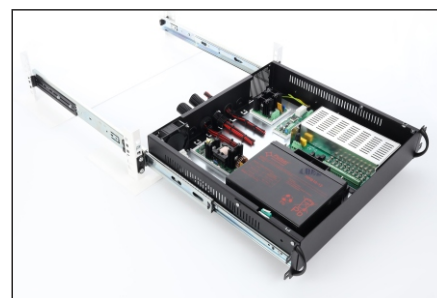

Mounting on a
ARAS600N/800N/1000N rail

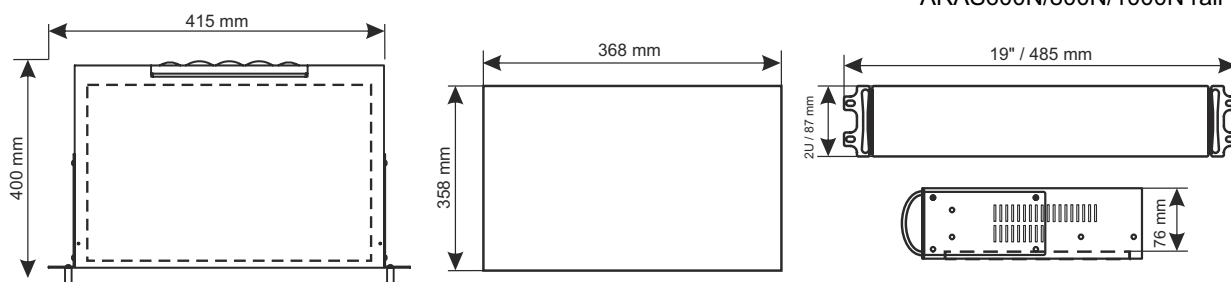

DESTINATION

Due to its design, the **ARAD2N** enclosure is intended for mounting inside RACK 19" cabinets, with depths of 600 – 1000mm, 19" standard. This general-purpose enclosure may serve as an auxiliary element for integrating CCTV, AC, I&HAS, RTV, LAN systems in RACK 19" cabinets. It is intended for mounting:

- control panel and optionally additional modules
- access control controllers with optional modules
- other dedicated devices
- power supply units
- battery

TECHNICAL DATA

| | |
|---|---|
| Tamper switch protection | 1 x microswitch: enclosure opening 0,5 A; 50 V DC max. NC – normally closed contacts |
| Protection class EN 62368-1 | I (first) |
| Rated current of protective connection | 6 A max |
| Mounting dimensions | W=19", H=2U |
| Enclosure dimensions | W=415, H=87, D=400 [+/-2 mm] |
| Mounting plate | W=368, H=358 [+/-2 mm] |
| Recommended battery/batteries | 17 Ah / 12 V (SLA) |
| Material | Sheet metal DC01, thick: 1 mm; Protection anticorrosion; Color: RAL 9005 - black |
| Closing | Bolted: 2x M3 |
| Destination | Inside |
| Net/gross weight | 5.30 / 5.81 [kg] |
| Notes | front mounting, 4 M6 screws + cage nuts included possible mount by using ARAS...N rails – additional accessory |
| Declarations, warranty | CE, 2 years |