


CODE: **AWO003** v.1.5/IV  
 NAME: **7/TRP20/PAR**

EN

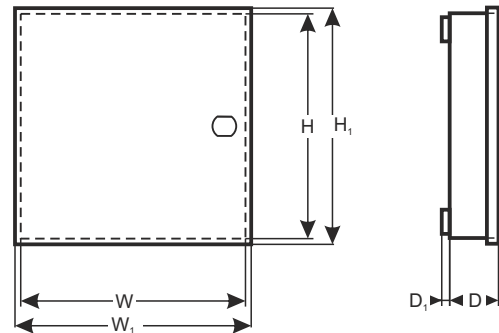

## DESTINATION

### PARADOX

- 1) MG5050
- 2) (728 ULT, E55, E65, MG5000) + PS817
- 3) SP4000, 5500, 6000

### MODULES:

- 1) (2 x ZX8, PGM4) + PS817
- 2) (ACM12, APR3-ADM2, PS17) + PS817
- 3) APR3- HUB2 + ZX8(PGM4) + PS817

## TECHNICAL DATA

<b>External dimensions of the enclosure:</b>	W=250, H=250, D+D1=80+8 [±2 mm]
<b>External dimensions of the front panel:</b>	W1=255, H1=255 [±2 mm]
<b>Battery space:</b>	7 Ah /12 V Sealed Lead Acid (SLA)
<b>Weight net/gross:</b>	2,25 / 2,40 [kg]
<b>Transformer:</b>	TRP 20 VA/16 V/18 V in the case of PC/ABC in class UL94-V0, IP30
<b>Power supply:</b>	230 V(-15%/+10%); 50 Hz, 120mA (max.)
<b>Power supply output:</b>	U1=16 V AC or U2=18 V AC (-5%, +15%), I1=2,2 A or I2=2,0 A (max.)
<b>Operating environment:</b>	class II, -10°C+ 40°C
<b>Material description:</b>	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
<b>Destination:</b>	indoor
<b>Tamper protection:</b>	1 x microswitch: opening, wall tamper 0,5 A ;50 V DC max. NC - normally closed contacts
<b>Closing:</b>	sheet-metal screws x 4
<b>Notes:</b>	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal, holes for MAGELLAN (antennas)
<b>Declaration, warranty:</b>	CE, 2 year from the production date