



Code: **RS4288P** v.1.0/1

Name: **42U RACK server cabinet with perforated door, floor standing, ready to assemble 800x800**

EN

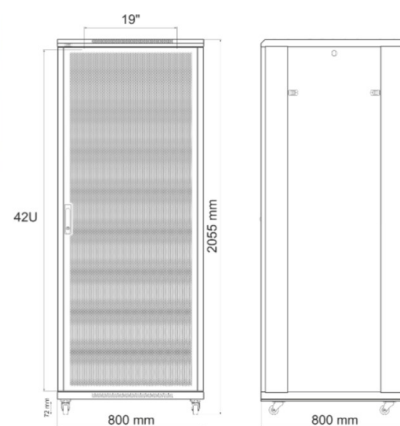

DESTINATION

The RACK 19" cabinet enables integrating CCTV, AC, I&HAS, RTV, LAN, or other systems in medium and big companies. They are intended for devices manufactured in enclosures of 19" standard. Thanks to RACK cabinets, devices are aesthetically mounted and protected against mechanical damage.

TECHNICAL DATA:

Mounting dimensions:	19" x 42U x 582 mm
Dimensions:	800 x 2055 x 800 [mm, +/-2] distance from surface: 72 mm
Material:	cold-rolled steel SPCC, 1.2mm, 1.5mm, 2mm, RAL9004 (black), metallic front door with perforation - 1.2mm side panels - 1,2mm rear door - 1.2mm frame - 1,2mm horizontal mounting rails- 1.5mm RACK mounting rails - 2mm
Static load:	1000 [kg] - with leveling feet
Closing:	front door - lock (RAZ-S, same code) rear door - lock (RAZ25, same code) side panel - Click (lock assembly possible - RAZB16)
Destination:	indoor
Protection grade EN60529:	IP 20
Weight:	109 / 122.8 [kg]
Type Cabinets:	floor standing, ready to assemble, server
Notes:	4 casters without locks and 4 leveling feet included changeable door - right or left 2 vertical cable management panels included
Warranty:	2 years
Declaration:	CE